




UNITED SIGNS
DIGITAL DISPLAYS

Platinum Series

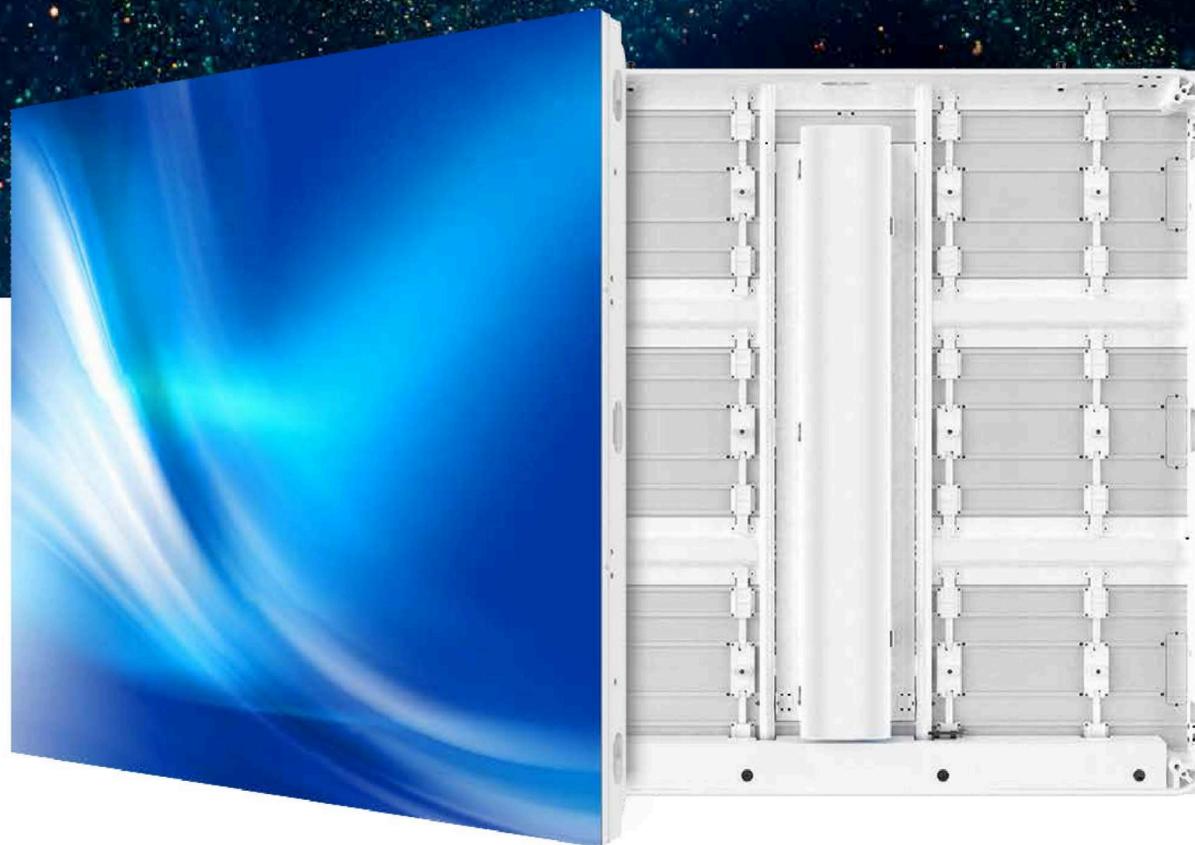

Outdoor Fixed Installation Product

- **100% Front & Rear Maintenance**
All modules, power supply & other parts can be dismantled from the front & back.
- **Flexible Location for Modules**
The same module can be placed on either the right or left side.
- **Excellent Heat Dissipation**
Special heat dissipation module design+cabinet fan. No AC needed.
- **Multiple Ways to Install**
Wall mounted, Pole mounted, & Curved Mount up to 90 degrees curved corner splicing.

Smarter.
Brighter. Greener.



The perfect LED solution for:

Hospitality | Schools | Sports Stadiums |
Entertainment Venues | Retail | Manufacturing



Parts Warranty

Best in the industry 5
year factory parts
warranty




Lifetime Support

Contact our technical
support team with any
and all technical issues




Lifetime Cloud

Enjoy accessing your
display(s) from
anywhere and anytime



Lifetime Software

Viplex handy software
included with all sign
packages and displays



Easy Assembly

Simple plug and play
modular panel for easy
accessibility and
troubleshooting



High Definition

Highest refresh rates in
the industry with
crystal clear images,
text, and video content



Extreme Brightness

Outshine the sunshine
with 10,000+ nits of
brightness



Training

We provide training on
all aspects of the sign
from maintenance to
daily use



Content Creation

Our design team can
help you create
stunning templated
designs



PARAMETERS	P6	P8	P10
Pitch	6.67mm	8mm	10mm
Cabinet Size	37.8"x37.8" or 50.4"x50.4"	37.8"x37.8" or 50.4"x50.4"	37.8"x37.8" or 50.4"x50.4"
Module Size	18.89"x12.60"	18.89"x12.60"	18.89"x12.60"
Cabinet Weight	60lbs	60lbs	60lbs
Cabinet Maintenance	Front & Rear Service	Front & Rear Service	Front & Rear Service
Cabinet Material	Aluminum	Aluminum	Aluminum
Max Power Consumption	750w/n'	750w/n'	750w/n'
Voltage	AC 120-208v	AC 120-208v	AC 120-208v
Brightness	9000 nits	10,000 nits	10,000 nits
Weather Rating	IP66	IP67	IP68
Color Temp	6500-9500k	6500-9500k	6500-9500k
Lifespan	100,000 Hours	100,000 Hours	100,000 Hours
Refresh Rate	3840 hz	3840 hz	3840 hz
Working Temperature	Below 30C +70C	Below 30C +70C	Below 30C +70C
Contrast Ratio	3000 to 1	3000 to 1	3000 to 1



Additional Support

Multiple Communication Options

- Hardwired
- Wifi Modern
- Cellular Modem with a lifetime contract

5 Year Factory Parts Warranty

- Confidence in quality of construction & availability of replacement/repair parts

LED Display Features


- 60 FPS
- Trillion of colors

24 Hour Technical Support from US Locations

- No chance for lack of help due to overseas time zones or time of day
- Repository of training videos available on internet 24/7

Unlimited Software Seats/Licenses

- Creative Library
- Custom Content available
- Corporate creative content portals

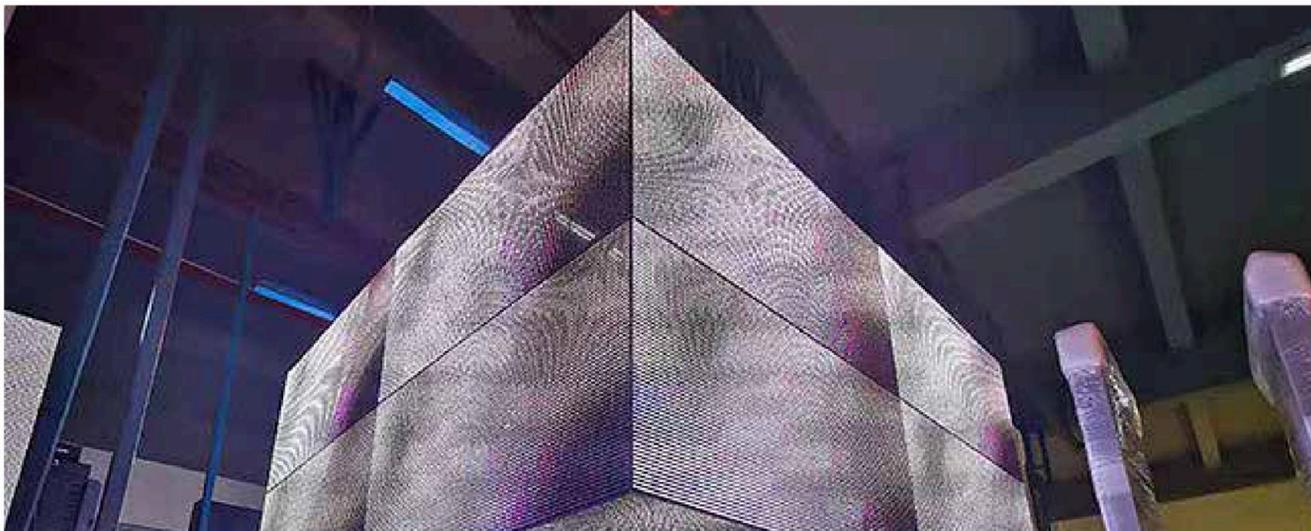

**United
Signs, LLC**

Atlanta | Dallas